

## Specifications & Consumer information

|                                             |     |
|---------------------------------------------|-----|
| Dimensions .....                            | 8-2 |
| Bulb wattage .....                          | 8-2 |
| Tires and wheels .....                      | 8-3 |
| Capacity/Weight .....                       | 8-3 |
| Recommended lubricants and capacities ..... | 8-4 |
| • Recommended SAE viscosity number .....    | 8-5 |
| Vehicle identification number (VIN) .....   | 8-6 |
| Vehicle certification label .....           | 8-6 |
| Tire specification and pressure label ..... | 8-7 |
| Engine number .....                         | 8-7 |

### DIMENSIONS

| Item           | mm (in)                                                                              |
|----------------|--------------------------------------------------------------------------------------|
| Overall length | 4-door : 4550 (178.3)<br>2-door : 4540 (178.7)                                       |
| Overall width  | 1775 (69.9)                                                                          |
| Overall height | 1430 (56.5)                                                                          |
| Front tread    | 1563 (61.5)* <sup>1</sup> / 1549 (61.0)* <sup>2</sup> /<br>1551 (61.1)* <sup>3</sup> |
| Rear tread     | 1576 (62.0)* <sup>1</sup> / 1562 (61.5)* <sup>2</sup> /<br>1564 (61.6)* <sup>3</sup> |
| Wheelbase      | 2700 (106.3)                                                                         |

\*<sup>1</sup> : with R15 tire

\*<sup>2</sup> : with R16 tire

\*<sup>3</sup> : with R17 tire

### BULB WATTAGE

| Light Bulb                                   |            | Wattage     | Bulb Type   |
|----------------------------------------------|------------|-------------|-------------|
| Headlights (Low)                             | Standard   | 55          | H11         |
|                                              | Projection | 60          | 9005L+*     |
| Headlights (High)                            |            | 55          | H7 LL       |
| Front turn signal lights/<br>Position lights |            | 28/8/LED    | P28/8W LED  |
| Side repeater lights                         |            | LED         | -           |
| Front fog lights*                            |            | 27          | GE881       |
| Stop/tail lights (outside)                   |            | 28/8 or LED | 2357 or LED |
| Tail light (inside)                          |            | 5           | W5W         |
| Rear turn signal lights (outside)            |            | 27          | 1156NA      |
| Back-up lights (outside)                     |            | 16          | W16W        |
| High mounted stop light                      |            | 21          | W21W        |
| License plate lights                         |            | 5           | W5W         |
| Map lamps                                    |            | 8           | FESTTON 8W  |
| Room lamps                                   |            | 8           | FESTTON 8W  |
| Trunk lamp                                   |            | 5           | FESTTON 5W  |

\* : If equipped

## TIRES AND WHEELS

| Item                                  | Tire size   | Wheel size | Inflation pressure<br>kPa (psi) |             |              |             | Wheel lug nut torque<br>kg•m (lb•ft, N•m) |
|---------------------------------------|-------------|------------|---------------------------------|-------------|--------------|-------------|-------------------------------------------|
|                                       |             |            | Normal load *1                  |             | Maximum load |             |                                           |
|                                       |             |            | Front                           | Rear        | Front        | Rear        |                                           |
| Full size tire                        | P195/65 R15 | 6.0J×15    | 230 (33)                        | 230 (33)    | 230 (33)     | 230 (33)    | 9~11<br>(65~79, 88~107)                   |
|                                       | P205/55 R16 | 6.5J×16    | 230 (33)                        | 230 (33)    | 230 (33)     | 230 (33)    |                                           |
|                                       | P215/45 R17 | 7.0J×17    | 230 (33)                        | 230 (33)    | 230 (33)     | 230 (33)    |                                           |
| Compact spare tire*2<br>(if equipped) | T125/80D15  | 4.0T×15    | 420<br>(60)                     | 420<br>(60) | 420<br>(60)  | 420<br>(60) |                                           |

\*1 Normal load : Up to 3 persons

\*2 If your vehicle is not equipped with a compact spare tire, you will be equipped with a Tire Mobility Kit



### CAUTION

***When replacing tires, use the same size originally supplied with the vehicle.***

***Using tires of a different size can damage the related parts or make it work irregularly.***

## CAPACITY/WEIGHT

| Item                              | Gasoline 1.8                         | Gasoline 2.0                         |
|-----------------------------------|--------------------------------------|--------------------------------------|
| Gross vehicle weight<br>kg (lbs.) | MT : 1739 (3836)<br>AT : 1759 (3880) | MT : 1739 (3836)<br>AT : 1759 (3880) |
| Luggage volume<br>l (cu ft)       | 420 (14.8)                           | 420 (14.8)                           |

## RECOMMENDED LUBRICANTS AND CAPACITIES

To help achieve proper engine and powertrain performance and durability, use only lubricants of the proper quality. The correct lubricants also help promote engine efficiency that results in improved fuel economy.

| Lubricant                                                                                                                                                      |                     | Volume                     | Classification                                                                          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------------------|-----------------------------------------------------------------------------------------|
| Engine oil * <sup>1</sup> * <sup>2</sup> (drain and refill)<br>Recommends<br> | Nu 2.0/<br>Nu 1.8   | 4.0 l (4.23 US qt.)        | API Service SM* <sup>3</sup> , ILSAC GF-4 or above                                      |
| Manual transaxle fluid                                                                                                                                         |                     | 1.9 l (2.01 US qt.)        | API GL-4, SAE 75W/85                                                                    |
| Automatic transaxle fluid                                                                                                                                      |                     | 7.3 l (7.71 US qt.)        | MICHANG ATF SP-4, SK ATF SP-4<br>NOCA ATF SP-4, HYUNDAI genuine ATF SP-4                |
| Coolant                                                                                                                                                        | Manual transaxle    | 6.0 l (6.34 US qt.)        | Mixture of antifreeze and water<br>(Ethylene glycol base coolant for aluminum radiator) |
|                                                                                                                                                                | Automatic transaxle | 5.9 l (6.23 US qt.)        |                                                                                         |
| Brake fluid                                                                                                                                                    |                     | 0.7~0.8 l (0.7~0.8 US qt.) | FMVSS116 DOT-3 or DOT-4                                                                 |
| Fuel                                                                                                                                                           | Nu 2.0              | 50 l (13.2 US gal.)        | -                                                                                       |
|                                                                                                                                                                | Nu 1.8              | 48 l (12.68 US gal.)       |                                                                                         |

\*<sup>1</sup> Refer to the recommended SAE viscosity numbers on the next page.

\*<sup>2</sup> Engine oils labeled Energy Conserving Oil are now available. Along with other additional benefits, they contribute to fuel economy by reducing the amount of fuel necessary to overcome engine friction. Often, these improvements are difficult to measure in everyday driving, but in a year's time, they can offer significant cost and energy savings.

\*<sup>3</sup> If the API service SM engine oil is not available in your country, you are able to use API service SL.

## Recommended SAE viscosity number

### CAUTION

*Always be sure to clean the area around any filler plug, drain plug, or dipstick before checking or draining any lubricant. This is especially important in dusty or sandy areas and when the vehicle is used on unpaved roads. Cleaning the plug and dipstick areas will prevent dirt and grit from entering the engine and other mechanisms that could be damaged.*

Engine oil viscosity (thickness) has an effect on fuel economy and cold weather operating (engine start and engine oil flowability). Lower viscosity engine oils can provide better fuel economy and cold weather performance, however, higher viscosity engine oils are required for satisfactory lubrication in hot weather.

Using oils of any viscosity other than those recommended could result in engine damage.


When choosing an oil, consider the range of temperature your vehicle will be operated in before the next oil change. Proceed to select the recommended oil viscosity from the chart.

| Temperature Range for SAE Viscosity Numbers |      |              |     |     |    |    |    |     |     |    |
|---------------------------------------------|------|--------------|-----|-----|----|----|----|-----|-----|----|
| Temperature                                 | °C   | -30          | -20 | -10 | 0  | 10 | 20 | 30  | 40  | 50 |
|                                             | (°F) | -10          | 0   | 20  | 40 | 60 | 80 | 100 | 120 |    |
| Engine Oil *1                               |      | 10W-30       |     |     |    |    |    |     |     |    |
|                                             |      | 5W-20, 5W-30 |     |     |    |    |    |     |     |    |
|                                             |      |              |     |     |    |    |    |     |     |    |

\*1. For better fuel economy, it is recommended to use the engine oil of a viscosity grade SAE 5W-20 (API SM / ILSAC GF-4). However, if the engine oil is not available in your country, select the proper engine oil using the engine oil viscosity chart.




## VEHICLE IDENTIFICATION NUMBER (VIN)

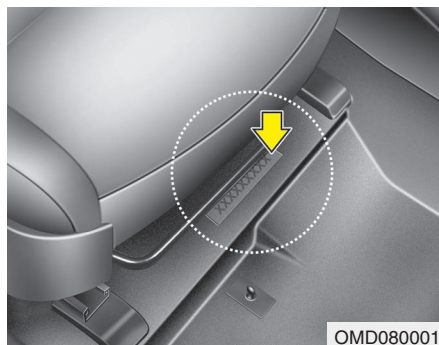


The vehicle identification number (VIN) is the number used in registering your car and in all legal matters pertaining to its ownership, etc.

The number is punched on the floor under the passenger seat. To check the number, open the cover.

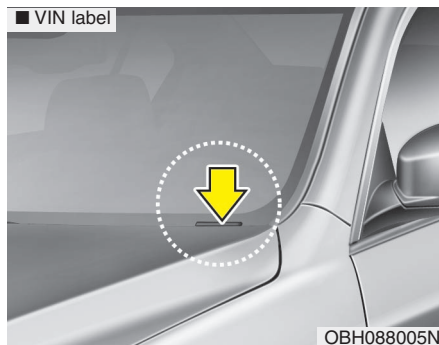


The VIN is also on a plate attached to the top of the dashboard. The number on the plate can easily be seen through the windshield from outside.

## VEHICLE CERTIFICATION LABEL

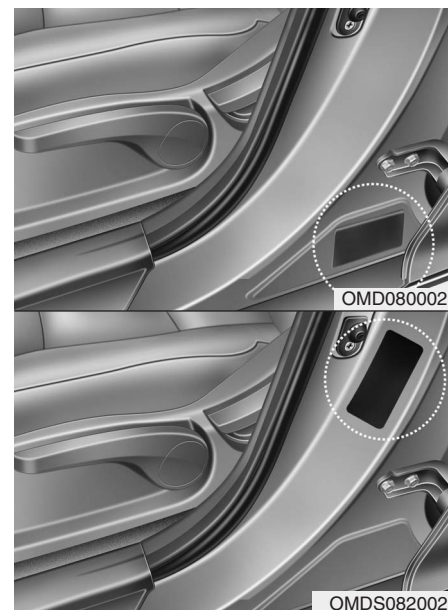

The vehicle certification label attached on the driver's side center pillar gives the Vehicle Identification Number (VIN).


## TIRE SPECIFICATION AND PRESSURE LABEL

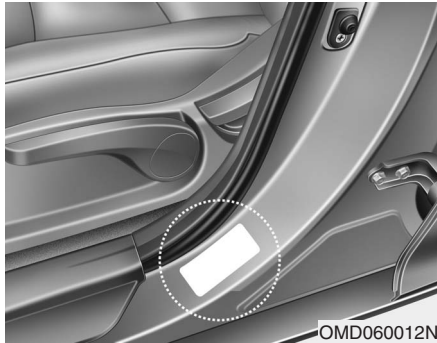

The tires supplied on your new vehicle are chosen to provide the best performance for normal driving.

The tire label located on the driver's side center pillar gives the tire pressures recommended for your car.

## ENGINE NUMBER

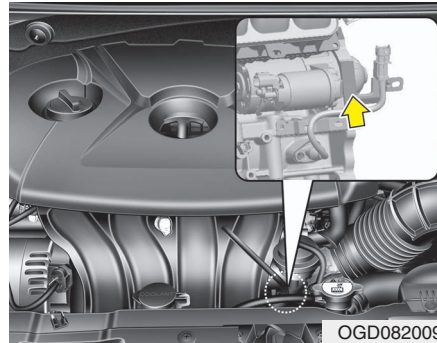

The engine number is stamped on the engine block as shown in the drawing.