

Specifications

Dimensions	8-2
Engine	8-2
Bulb Wattage	8-3
Tires and Wheels	8-4
Volume and Weight.....	8-5
Air Conditioning System.....	8-5
Recommended Lubricants and Capacities	8-6
Recommended SAE viscosity number	8-8
Vehicle Identification Number (VIN)	8-9
Vehicle Certification Label.....	8-9
Tire Specification and Pressure Label	8-10
Engine Number	8-10

DIMENSIONS

Items		mm (in)	
		4 Door	5 Door
Overall length		4,385 (172.6)	4,185 (164.8)
Overall width		1,729 (68.0)	
Overall height		1,450 (57.1)	
Front	185/65 R15	1,524 (60.0)	
	205/45 R17	1,512 (59.5)	
Rear	185/65 R15	1,529 (60.2)	
	205/45 R17	1,517 (59.7)	
Wheel base		2,580 (101.5)	

ENGINE

Items		Gamma 1.6 GDI
Displacement	cc (cu. in)	1,591 (97.09)
Bore x Stroke	mm (in.)	77x85.4 (3.03x3.36)
Firing order		1-3-4-2
No. of cylinders		In-line 4 cylinder

BULB WATTAGE

Light Bulb				Bulb Type	Wattage	
Front	Headlamp	High/Low	Type A	HB2	60/55	
			Type B	HB3	60	
		LED		LED		
			Position lamp	Type A	PY28/8W	8
		Type B		LED	LED	
		Side marker	Type A	W5W	5	
			Type B	LED	LED	
		Turn signal lamp	Type A	PY28/8W	28	
			Type B	PY21W	21	
		Daytime running light (DRL)	Type A	HB2	60/55	
	Type B		LED	LED		
	Fog lamp				HB4	51
Side repeater				N/A	N/A	
Rear	Rear combination lamp	Tail/Stop	Type A	P28/8W	28/8	
			Type B	LED	LED	
		Tail	Type A	P28/8W	8	
			Type B	LED	LED	
		Turn signal		PY27W	27	
		Back up		W16W	16	
	License plate lamp				W5W	5
	High mounted stop lamp				W16W	16
Interior	Luggage room lamp			FESTOON	5	
	Overhead console lamp			WEDGE	10	
	Room lamp			FESTOON	10	
	Vanity lamp			FESTOON	5	

TIRES AND WHEELS

Items	Tire Size	Wheel Size	Inflation pressure kPa (psi)				Wheel lug nut torque kgf·m (lbf·ft, N·m)
			Normal Load		Maximum Load		
			Front	Rear	Front	Rear	
Full size tire	185/65 R15	5.5J X 15	230 (33)		230 (33)		11~13 (79~94, 107~127)
	205/45 R17	6.5J X 17					
Compact spare tire	T125/80 D15	3.5J X 15	420 (60)		420 (60)		

NOTICE

- It is permissible to add 20 kPa (3 psi) to the standard tire pressure specification if colder temperatures are expected soon. Tires typically loose 7 kPa (1 psi) for every 7°C (12°F) temperature drop. If extreme temperature variations are expected, recheck your tire pressure as necessary to keep them properly inflated.
- An air pressure generally decreases, as you drive up to a high-altitude area above sea level. Thus, if you plan to drive a high-altitude area, check the tire pressures in advance. If necessary, inflate them to a proper level (Air inflation per altitude: +10 kPa/1 km (+2.4 psi/1 mile)).

CAUTION

When replacing tires, use the same size originally supplied with the vehicle.
Using tires of a different size can damage the related parts or not work properly.

VOLUME AND WEIGHT

Items	Gamma 1.6 GDI						
	4 Door			5 Door			
	M/T	A/T		M/T		A/T	
Gross vehicle weight kg (lbs.)	15"	17"	15"	17"	15"	17"	15"
	1,560 (3,439)	1,650 (3,638)	1,600 (3,527)	1,600 (3,527)	1,580 (3,483)	1,650 (3,638)	1,600 (3,527)
	387 (13.7)			616 (21.8)			
Luggage volume (SAE) l (cu ft)	387 (13.7)			616 (21.8)			

M/T : Manual transmission

A/T : Automatic transmission

AIR CONDITIONING SYSTEM

Items	Weight of Volume	Classification
Refrigerant g (oz.)	480±25 (16.9±0.88)	R-1234yf
Compressor lubricant cc (oz.)	110±10 (3.88±0.35)	PAG

Contact an authorized HYUNDAI dealer for more details.

RECOMMENDED LUBRICANTS AND CAPACITIES

To help achieve proper engine and powertrain performance and durability, use only lubricants of the proper quality. The correct lubricants also help promote engine efficiency that results in improved fuel economy.

Lubricant	Volume	Classification
Engine oil ^{*1} ^{*2} (drain and refill) Recommends 	3.3 l (3.49 US qt.)	API SM ^{*3} & ILSAC GF-4 (or above) ACEA A5/B5 ^{*4}
Manual transmission fluid	1.6 ~ 1.7 l (1.7 ~ 1.8 US qt.)	HK SYN MTF 70W (SK) SPIRAX S6 GHME 70W MTF (H.K.SHELL) GS MTF HD 70W (GS CALTEX) (API GL-4, SAE 70W TGO-9)
Automatic transmission fluid	6.7 l (7.1 US qt.)	MICHANG ATF SP-IV, SK ATF SP-IV, NOCA ATF SP-IV, HYUNDAI genuine ATF SP-IV

Lubricant	Volume	Classification
Coolant	5.3 l (5.60 US qt.)	Mixture of antifreeze and water (Phosphate-based Ethylene glycol coolant for aluminum radiator)
Brake/Clutch fluid	0.7~0.8 l (0.7~0.8 US qt.)	FMVSS116 DOT-3 or DOT-4
Fuel	45 l (11.9 US gal.)	Refer to "Fuel requirements" in the Foreword chapter.

*1 : Refer to the recommended SAE viscosity numbers on the next page.

*2 : Engine oils labeled Energy Conserving Oil are now available. Along with other additional benefits, they contribute to fuel economy by reducing the amount of fuel necessary to overcome engine friction. Often, these improvements are difficult to measure in everyday driving, but in a year's time, they can offer significant cost and energy savings.

*3 : If the API service SM engine oil is not available in your country, you are able to use API service SL.

*4 : If the ACEA A5 engine oil is not available in your country, you are able to use ILSAC GF-3 (or above) or ACEA A3 (or above).

Recommended SAE viscosity number



CAUTION

Always be sure to clean the area around any filler plug, drain plug, or dipstick before checking or draining any lubricant. This is especially important in dusty or sandy areas and when the vehicle is used on unpaved roads. Cleaning the plug and dipstick areas will prevent dirt and grit from entering the engine and other mechanisms that could be damaged.

Engine oil viscosity (thickness) has an effect on fuel economy and cold weather operating (engine start and engine oil flowability). Lower viscosity engine oils can provide better fuel economy and cold weather performance, however, higher viscosity engine oils are required for satisfactory lubrication in hot weather.

Using oils of any viscosity other than those recommended could result in engine damage.


When choosing an oil, consider the range of temperature your vehicle will be operated in before the next oil change. Proceed to select the recommended oil viscosity from the chart.

Temperature Range for SAE Viscosity Numbers										
Temperature	°C	-30	-20	-10	0	10	20	30	40	50
	(°F)	-10	0	20	40	60	80	100	120	
Engine Oil *1		10W-30								
		5W-20, 5W-30								

*1 : For better fuel economy, it is recommended to use the engine oil of a viscosity grade SAE 5W-20 (API SM / ILSAC GF-4). However, if the engine oil is not available in your country, select the proper engine oil using the engine oil viscosity chart.




VEHICLE IDENTIFICATION NUMBER (VIN)

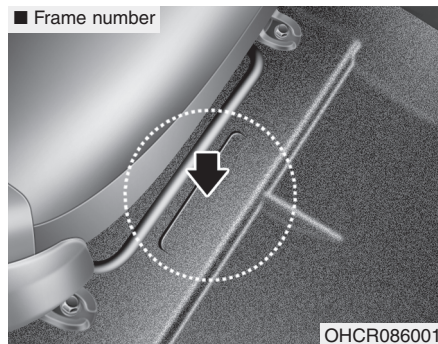


The vehicle identification number (VIN) is the number used in registering your car and in all legal matters pertaining to its ownership, etc.

The number is punched on the floor under the passenger seat. To check the number, open the cover.

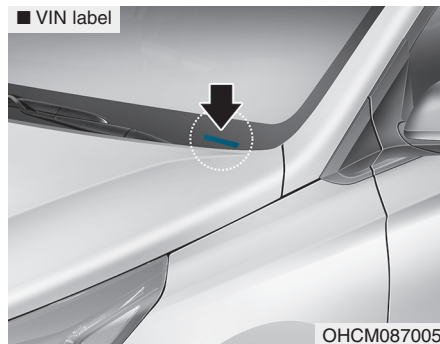


The VIN is also on a plate attached to the top of the dashboard. The number on the plate can easily be seen through the windshield from outside.

VEHICLE CERTIFICATION LABEL

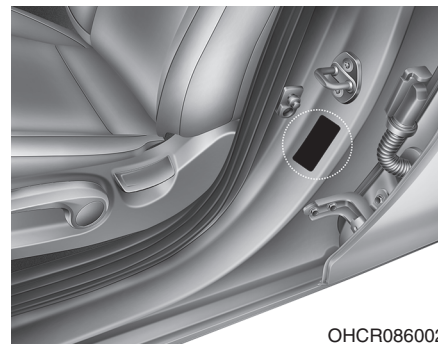

The vehicle certification label attached on the driver's side center pillar gives the Vehicle Identification Number (VIN).


TIRE SPECIFICATION AND PRESSURE LABEL

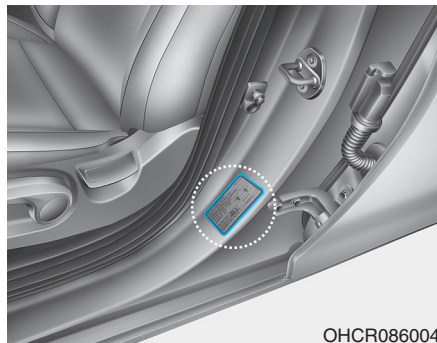

The tires supplied on your new vehicle are chosen to provide the best performance for normal driving.

The tire label located on the driver's side center pillar gives the tire pressures recommended for your car.

ENGINE NUMBER

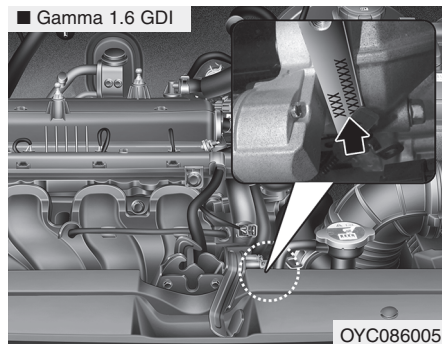

The engine number is stamped on the engine block as shown in the drawing.