

Specifications

Dimensions	8-2
Engine.....	8-2
Bulb Wattage	8-3
Tires and Wheels	8-4
Volume and Weight.....	8-6
Air Conditioning System.....	8-6
Recommended Lubricants and Capacities	8-7
Recommended SAE viscosity number	8-8
Vehicle Identification Number (VIN)	8-9
Vehicle Certification Label.....	8-9
Tire Specification and Pressure Label	8-10
Engine Number	8-10

DIMENSIONS

Items		mm (in)
Overall length		4,265 (167.91)
Overall width		1,810 (71.26)
Overall height	225/40ZR18	1,399 (55.08)
	235/35R19	1,394 (54.88)
Front tread	225/40ZR18	1,557 (61.30)
	235/35R19	1,555 (61.22)
Rear tread	225/40ZR18	1,566 (61.65)
	235/35R19	1,564 (61.57)
Wheelbase		2,650 (104.33)

ENGINE

Items	Displacement	Bore x Stroke	Firing order	No. of cylinders
2.0 T-GDI	1,998 cc (121.9 cu. in)	86 x 86 mm (3.39 x 3.39 in.)	1-3-4-2	In-line 4 cylinder

BULB WATTAGE

Light Bulb			Bulb Type	Wattage
Front	Headlamp	Low	LED	LED
		High	HB3	60
	Turn signal lamp		28W/8W	28
	Turn signal lamp (Outside mirror)		LED	LED
	Daytime running lamp (DRL) / Parking lamp		LED	LED
	Side Marker Lamp		LED	LED
Rear	Rear combination lamp	Stop/Tail	LED	LED
		Turn signal	PY27W	27
		Back up	W16W	16
	License plate lamp		W5W	5
	High mounted stop lamp		LED	LED
	Side Marker Lamp		LED	LED
Interior	Map lamp		W10W	10
	Room lamp		FESTOON	8
	Vanity mirror lamp		FESTOON	5
	Tailgate room lamp		FESTOON	10

TIRES AND WHEELS

Full size tire

Tire Size	Wheel Size	Inflation pressure [kPa (bar, psi)]								Wheel lug nut torque [kgf•m (lbf•ft, N•m)]
		Normal Load (less than 160km/h or 100mph)		Maximum Load (less than 160km/h or 100mph)		High-speed driving (over 160km/h or 100mph) * ¹		Track driving * ²		
		Front	Rear	Front	Rear	Front	Rear	Front	Rear	
225/40ZR18	7.5J X 18	250 (2.5, 36)	230 (2.3, 33)	280 (2.8, 41)	280 (2.8, 41)	280 (2.8, 41)	280 (2.8, 41)	250 (2.5, 36)	250 (2.5, 36)	11~13 (79~94, 107~127)
235/35R19	8.0J X 19	260 (2.6, 38)	240 (2.4, 35)	290 (2.9, 42)	290 (2.9, 42)	290 (2.9, 42)	290 (2.9, 42)	260 (2.6, 38)	260 (2.6, 38)	

*1 : Must drive only where the speed is legal

*2 : Refers to the recommended inflation pressure for the hot tire condition (state when the tire temperature is increased). Limited number of passengers is 2 with no luggage. After the track driving is complete, change to the appropriate tire inflation recommended for the normal road driving condition.

Tires specified to this vehicle will have "HN" logo molded on the tire.

Compact spare tire*1

Tire Size	Wheel Size	Inflation pressure [kPa (bar, psi)]		Wheel lug nut torque [kgf•m (lbf•ft, N•m)]
		Front	Rear	
T125/70R18	4.0T X 18	420 (4.2, 60)		11~13 (79~94, 107~127)

*1 : If your vehicle is not equipped with a compact spare tire, your vehicle will be equipped with a Tire Mobility Kit.

NOTICE

- It is permissible to add 20 kPa (3 psi) to the standard tire pressure specification if colder temperatures are expected soon. Tires typically lose 7 kPa (1 psi) for every 7°C (12°F) temperature drop. If extreme temperature variations are expected, recheck your tire pressure as necessary to keep them properly inflated.
- An air pressure generally decreases, as you drive up to a high-altitude area above sea level. Thus, if you plan to drive a high-altitude area, check the tire pressures in advance. If necessary, inflate them to a proper level (Air inflation per altitude: +10 kPa/1 km (+2.4 psi/1 mile)).
- Must do not exceed maximum inflation pressure shown on equipped tire sidewall.

 CAUTION

**When replacing tires, use the same size originally supplied with the vehicle.
Using tires of a different size can damage the related parts or not work properly.**

VOLUME AND WEIGHT

Item		2.0 T-GDI
		M/T
Gross vehicle weight	kg (lbs.)	1,850 (4,079)
Luggage volume (SAE)	l (cu. ft.)	Behind 1st Row : 1,261 (44.5) Behind 2nd Row : 565 (19.9)

M/T : Manual transmission

AIR CONDITIONING SYSTEM

Items		Weight of Volume	Classification
Refrigerant	g (oz.)	450 (15.87) ± 25 (0.88)	R-1234yf
Compressor lubricant	cc (oz.)	120 (4.23) ± 10 (0.35)	PAG

Contact an authorized HYUNDAI dealer for more details.

RECOMMENDED LUBRICANTS AND CAPACITIES

To help achieve proper engine and powertrain performance and durability, use only lubricants of the proper quality. The correct lubricants also help promote engine efficiency that results in improved fuel economy.

Lubricant	Volume	Classification
Engine oil ^{*1} ^{*2} (drain and refill) Recommends 	4.8 l (5.07 US qt.)	SAE 0W-30 / API Latest(ILSAC Latest) or ACEA C2
Manual transmission fluid	1.8 ~ 1.9 l (1.9 ~ 2.0 US qt.)	HK SYN MTF 70W (SK) SPIRAX S6 GHME 70W MTF (H.K.SHELL) GS MTF HD 70W (GS CALTEX) API GL-4, SAE 70W
Coolant	7.4 l (7.8 US qt.)	Mixture of antifreeze and water (Phosphate-based Ethylene glycol coolant for aluminum radiator)
Brake/Clutch fluid	0.7 ~ 0.8 l (0.74~0.85 US qt.)	SAE J1704 DOT4 LV (ISO4925 CLASS6, FMVSS 116 DOT4+)
Fuel	50 l (13.2 US gal.)	Refer to "Fuel requirements" in the Foreword chapter.

^{*1} : Refer to the recommended SAE viscosity numbers on the next page.

^{*2} : Engine oils labeled Energy Conserving Oil are now available. Along with other additional benefits, they contribute to fuel economy by reducing the amount of fuel necessary to overcome engine friction especially in colder weather conditions.

Recommended SAE viscosity number

 CAUTION

Always be sure to clean the area around any filler plug, drain plug, or dipstick before checking or draining any lubricant. This is especially important in dusty or sandy areas and when the vehicle is used on unpaved roads. Cleaning the plug and dipstick areas will prevent dirt and grit from entering the engine and other mechanisms that could be damaged.

Engine oil viscosity (thickness) has an effect on fuel economy and cold weather operating (engine start and engine oil flowability). Lower viscosity engine oils can provide better fuel economy and cold weather performance, however, higher viscosity engine oils are required for satisfactory lubrication in hot weather.

Using oils of any viscosity other than those recommended could result in engine damage.


When choosing an oil, consider the range of temperature your vehicle will be operated in before the next oil change. Proceed to select the recommended oil viscosity from the chart.

Temperature Range for SAE Viscosity Numbers										
Temperature	°C	-30	-20	-10	0	10	20	30	40	50
	(°F)	-10	0	20	40	60	80	100	120	
Engine Oil *1		20W-50								
		15W-40								
		10W-30								
		0/5W-30, 5W-40								

*1 : For better fuel economy, it is recommended to use the engine oil of a viscosity grade SAE 0W-30. However, if the engine oil is not available in your country, select the proper engine oil using the engine oil viscosity chart.




VEHICLE IDENTIFICATION NUMBER (VIN)

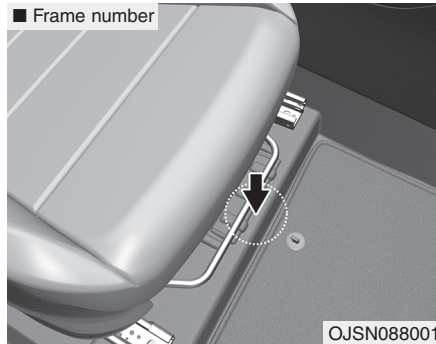

The vehicle identification number (VIN) is the number used in registering your car and in all legal matters pertaining to its ownership, etc.

The number is punched on the floor under the passenger seat. To check the number, open the cover.

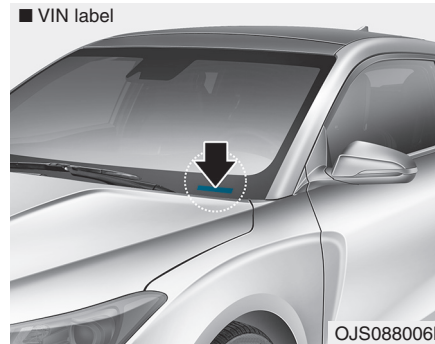


The VIN is also on a plate attached to the top of the dashboard. The number on the plate can easily be seen through the windshield from outside.

VEHICLE CERTIFICATION LABEL



The vehicle certification label attached on the driver's side center pillar gives the Vehicle Identification Number (VIN).


TIRE SPECIFICATION AND PRESSURE LABEL

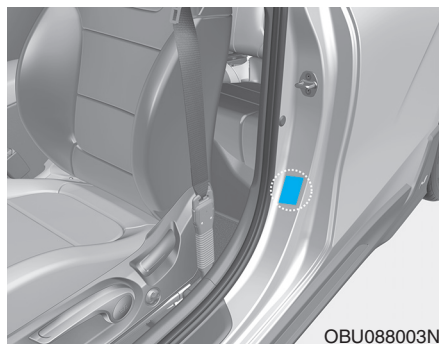

The tires supplied on your new vehicle are chosen to provide the best performance for normal driving.

The tire label located on the driver's side center pillar gives the tire pressures recommended for your car.

ENGINE NUMBER

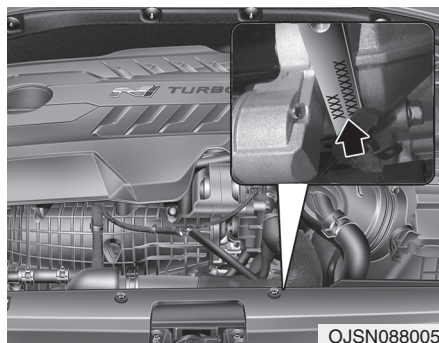

The engine number is stamped on the engine block as shown in the drawing.